




The New Standard for High-Density Panel Design

A30UM Current Transformers *"Ultra Mini, Ultra Efficient"*

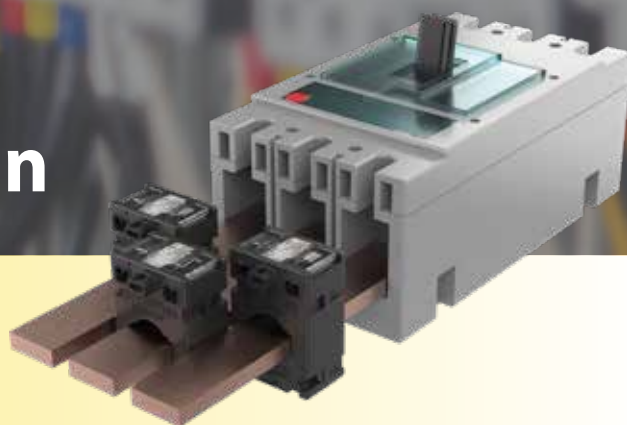

Compact Breaker
Compatibility

Reduced Labor and
Installation Time

No Busbar
Bending Required

Wide Current Range:
100A – 600A



www.entes.eu


   / enteselektronik

FEATURES

- Compliant with TS EN 61869-2 / IEC 61869-2 standards
- Maximum Operating Voltage (Un) 720V
- Operating Temperature -5°C...+40°C
- Rated power range 1-2,5 VA
- Rated continuous thermal current 1,2xIn

A30UM				5A SECONDARY		
VA	Class 1			Class 0,5		
	1,25	1,5	2	1,5	2	2,5
100	M6098					
125		M6097				
150						M6096
200			M6095			
250						M6094
300						M6093
400					M6092	
500				M6091		
600				M6090		

Dimensions (mm)

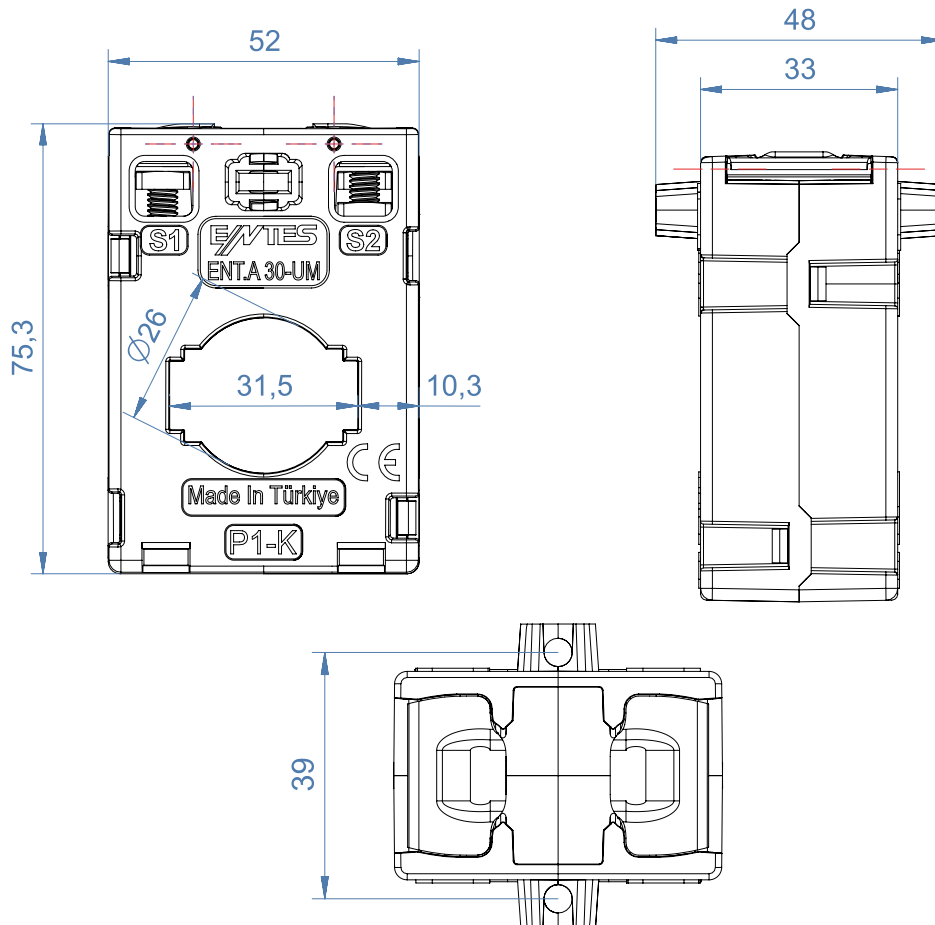

HEADQUARTERS

Address: Dudullu OSB; 1. Cadde; No: 23 34776 Umraniye - ISTANBUL / TÜRKİYE Tel: +90 216 313 01 10 Fax: +90 216 314 16 15 Sales Fax: +90 216 365 71 71
E-mail: contact@entes.eu Web: www.entes.eu Call Center Technical Support: 0850 888 84 25 Coordinates: 40,995852 N, 29,178398 E

INTERNATIONAL BRANCH OFFICES

ISTANBUL : contact@entes.eu Tel: +90 216 313 01 10 Fax: +90 216 314 16 15
INDIA : contact@entes.in Tel: +91 981 - 2980004
GREECE : contact@entes.eu Tel: +30 2310 706999 +30 2310 707296
GERMANY : kontakt@enteselektronik.com Tel: +49(0) 7022-931992-0

© ENTES Elektronik Cihazlar İmalat ve Ticaret A.Ş.

